

COMPREX

Data sheet LINE 5300

Compression fittings with cut brass olive

Contents

| | |
|-----------------------------|---|
| DESCRIPTION | 3 |
| ADVANTAGES | 3 |
| FIELDS OF APPLICATION | 4 |
| COMPONENTS AND MATERIALS | 5 |
| THREADS AND NUTS TIGHTENING | 6 |
| REGULATIONS | 7 |
| CERTIFICATIONS | 7 |
| ASSEMBLY INSTRUCTIONS | 8 |

LINE 5300

Compression fittings with cut brass olive for multilayer pipe

**COMPREX****DESCRIPTION**








Brass olive compression fittings for multilayer pipe (line 5300) are suitable for hot and cold water supply in sanitary and heating installations and for any kind of sanitary installation such as domestic, commercial, industry and farming. They can be used with any type of non-corrosive fluid.

The seal is guaranteed by the mechanical tightening of the fitting and the compression of the O-Ring of the pipe holder.

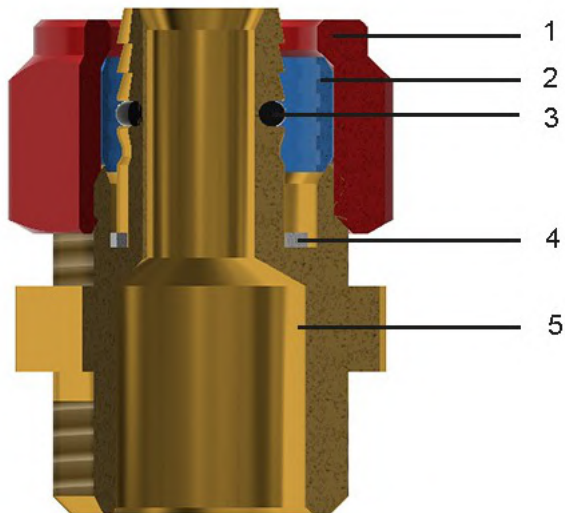
ADVANTAGES






- Wide range
- For drinking water and heating
- DVGW certified
- Raw materials complying with UBA LIST
- No contact between nickel and water

FIELDS OF APPLICATION

| APPLICATIONS | | T. min. | T. max | T. of the system | Max. pressure |
|---|--|---------|--------|------------------|---------------|
|  | drinking water | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | hot sanitary water | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | cooling | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | radiators | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | floor heating | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | irrigation | -20°C | +120°C | -20°C/+95°C | 10 bar |
|  | -20°C: with the use of glycol in a maximum percentage of 30% | | | | |

COMPONENTS AND MATERIALS



| LEGEND | | COMPONENTS | MATERIALS |
|---|---|----------------|------------------------------|
|  | 1 | Nut | Brass CW617N - UNI EN 12165 |
|  | 2 | Cut olive | Brass CW617N - UNI EN 12164 |
|  | 3 | O-Ring | Elastomer for drinking water |
|  | 4 | Insulated ring | TEFLON - FL8020 |
|  | 5 | Body | Brass CW617N - UNI EN 12165 |

THREADS AND NUTS TIGHTENING

| ∅ | Thread coupling | N° Turns (+1/4) |
|------|-----------------|-----------------|
| ∅ 14 | G 1/2" | 1/2 |
| ∅ 16 | G 1/2" | 1/2 |
| ∅ 18 | G 3/4" | 3/4 |
| ∅ 20 | G 3/4" | 3/4 |
| ∅ 26 | G 1" | 1/2 |
| ∅ 32 | M 39 x 1.5 | 1/2 |

REGULATIONS

- ISO 21003-3
“Multilayer piping systems for hot and cold water supply installations inside building”
- EN ISO 228-1:2003
Threads complies with UNI EN ISO 228-1:2003 law: “Piping thread for coupling not with thightness on the thread”.
- D.M. 174 (06/04/2004)
Raw materials used are of high quality and comply with the Ministerial Decree N°174 dated 06/04/2004 concerning the materials and the items used in fixed installations for water collection, treatment and supply.
- Comply with 4MS, UBA List (BC group), DIN 50930/6 Dir. 2011/65/UE, 6C attachment III (RhOSII).
- Comply with DVGW EN ISO 21003

CERTIFICATIONS

| COUNTRY | CERTIFICATION | COUNTRY | CERTIFICATION | COUNTRY | CERTIFICATION |
|---------|---------------|---------|---------------|---------|---------------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

ASSEMBLY INSTRUCTIONS

Cut the pipe perpendicularly to its axis using an appropriate pipe-cutting tool [code TT500.00].



Calibrate the pipe using special reamer [code CS50.00, MA00.90], removing possible residual chips. The pipe edge should be trimmed throughout the circumference.



Insert nut and olive on the pipe.



Insert the pipe in the body until it stops. With an hexagonal wrench, tighten the nut until reaching the number of threads shown in the table (see previous page).





GENERAL FITTINGS SPA

Via Golgi 73/75, 25064 Gussago (BS) - ITALY

te. +39 030 3739017

www.generalfittings.it