Fittings for copper pipe



SOBEK

Data sheet LINE 1400

Sanitary chrome plated fittings

GENERAL FITTINGS
YOUNIQUE · ITALIAN

Contents

DESCRIPTION 3
ADVANTAGES 3
FIELDS OF APPLICATION 3
THREADS AND NUTS TIGHTENING 3
COMPONENTS AND MATERIALS OF FITTINGS 4
REGULATIONS 4
CERTIFICATIONS 4
ASSEMBLY INSTRUCTIONS 6

LINE 1400

Sanitary chrome plated fittings



DESCRIPTION

Chromed fittings for sanitary installations [LINE 1400] are suitable for cold and hot water supply for any kind of sanitary systems, such as domestic, commercial, industry installations.

ADVANTAGES

- Wide range


FIELDS OF APPLICATION

APPLICATIONS		T. min.	T. max	Max. pressure
	sanitary hot water	+5°C	+80°C	10 bar

THREADS AND NUTS TIGHTENING

Ø	Thread coupling	N° Turns (+1/4)
Ø 8	3/8"	3/4
Ø 10	3/8"	3/4

COMPONENTS AND MATERIALS OF FITTINGS

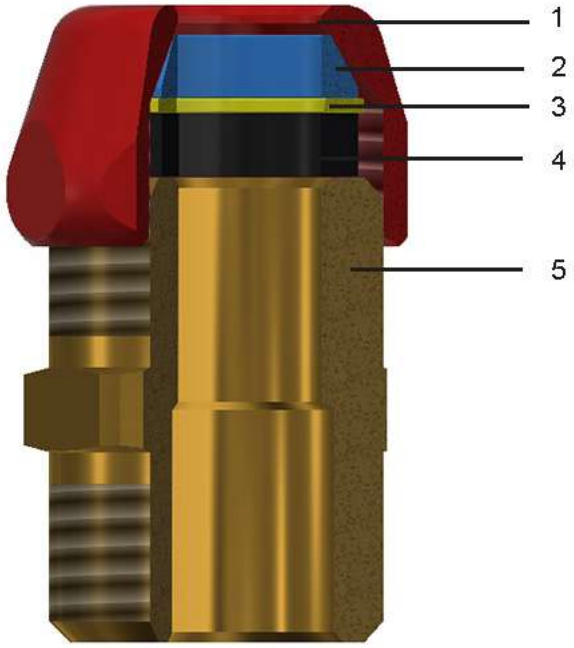

LEGEND		COMPONENTS	MATERIALS
	1	Nut	Brass CW617N chrome plated - UNI EN 12164
	2	Cut olive	Brass CW617N - UNI EN 12164
	3	Ring	Brass CW617N - UNI EN 12164
	4	Gasket	Elastomer for drinking water
	5	Body	Brass CW617N chrome plated - UNI EN 12164/12165

S

REGULATIONS


• UNI EN 1254-2 Fittings comply with UNI EN 1254-2 law: "Plumbing fittings - Fittings with compression ends for use with copper tubes."
• UNI EN ISO 228-1 Threads complies with UNI EN ISO 228-1 law: “Piping thread for coupling not with thightness on the thread”.

CERTIFICATIONS

COUNTRY	CERTIFICATION	COUNTRY	CERTIFICATION	COUNTRY	CERTIFICATION
					
					
					

ASSEMBLY INSTRUCTIONS

Cut the pipe perpendicularly to its axis using an appropriate pipe-cutting tool [code TT500.00]. Remove possible residual burr.

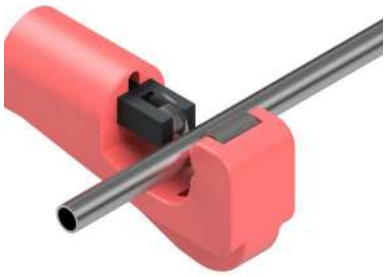

Insert nut, cut olive, ring and gasket on the pipe.



Insert the pipe in the body until it stops and tighten the nut by hand until allowed.



With an hexagonal wrench, tighten the nut until reaching the number of threads shown in the table (previous page)



GENERAL FITTINGS SPA
Via Golgi 73/75, 25064 Gussago (BS) - ITALY
te. +39 030 3739017
www.generalfittings.it